

**IMPINJ<sup>®</sup>**

**MONZA<sup>®</sup> 4**

**TAG CHIP DATASHEET**

**IPJ-W1510, IPJ-W1512, IPJ-W1513, IPJ-W1535**

## OVERVIEW

With the Monza® 4 tag chips, Impinj builds upon the field-proven Monza chip family—well-regarded in the industry as the most reliable, consistent, flexible, and fully UHF Gen 2-compliant tag chips available. The Monza 4 family provides a variety of models to suit diverse applications, including unique RFID privacy, tag orientation insensitivity, competitive and consistent read/write performance, and memory options optimized for use in manufacturing and supply chain industries.

## FEATURES

- **True3D™ antenna technology**—patented, dual-differential antenna ports enable compact Omni-directional tags, improving item-level read reliability
- **QT™ technology**—protects business sensitive data while assuring consumers of privacy
  - **Private/Public** data profiles—two different memory maps that enable tag owners to control exposure of data
  - **Short-range** option to prevent unauthorized access
- Inlay compatibility between all Monza 4 tag chips
- Available memory options to support large user-memory applications
- BlockPermalock Gen2 command adds flexibility in memory usage
- FastID™ mode enables 2x to 3x faster EPC+TID inventory for authentication and other TID-based applications
- TagFocus™ mode suppresses previously read tags to enable capture of more tags
- 96 bit Serialized TID with 48 bit Serial Number
- Superior read sensitivity of -19.5 dBm (single port operation) or -22 dBm (with True3D) with a single dipole tag.
- High performance write sensitivity of -16.7 dBm, with a single dipole tag, for unparalleled commissioning and bulk encoding reliability.
- Memory write speed of 3.4 ms for 32-bit writes enables 1200 tags/minute programming
- Extended temperature range (-40 °C to +85 °C) for performance under hard conditions
- Impinj's field-rewritable NVM (optimized for RFID) provides 100,000-cycle/50-year retention reliability
- EPCglobal and ISO 18000-63 compliant, Gen2V2 compliant.

# TABLE OF CONTENTS

Overview .....	i
Features .....	i
<b>1 Introduction.....</b>	<b>1</b>
1.1 Scope.....	1
1.2 Reference Documents .....	1
<b>2 Functional Description .....</b>	<b>2</b>
2.1 True3D Antenna Technology Improves Performance .....	2
2.2 QT Technology—Private, Public, Peek, and Short Range .....	5
2.2.1 Private/Public Profiles .....	6
2.2.2 Public/Private Profile Protection .....	8
2.2.3 Peek .....	9
2.2.4 QT Command Format.....	9
2.2.5 Recommended Public EPC Usage Guidelines.....	11
2.3 Increased Memory Options .....	12
2.3.1 Extended User Memory Option .....	13
2.3.2 Extended EPC Memory Option .....	14
2.3.3 Basic Memory Option .....	14
2.3.4 Industrial/Automotive application focused Option.....	15
2.4 Advanced Monza Features Support More Effective Inventory .....	16
2.5 Support for Optional Gen 2 Commands .....	16
2.6 Monza 4 Tag Chip Block Diagram .....	18
2.7 Pad Descriptions.....	18
2.8 Dual Antenna Input .....	19
2.9 Monza 4 Antenna Reference Designs .....	20
2.10 Monza 4 Tag Chip Dimensions .....	20
2.11 Power Management .....	20
2.12 Modulator/Demodulator .....	20
2.13 Tag Controller.....	20
2.14 Nonvolatile Memory.....	20
<b>3 Interface Characteristics .....</b>	<b>22</b>
3.1 Making Connections .....	22
3.1.1 Single-port Connection Option .....	22
3.1.2 Shunted-port Connection Option .....	23
3.1.3 Dual-port Connection Option .....	24
3.1.4 Source Impedance .....	25
3.2 Reader-to-Tag (Forward Link) Signal Characteristics .....	27
3.3 Reverse Link Signal Characteristics .....	28
<b>4 Tag Memory .....</b>	<b>29</b>
4.1 Monza 4 Tag Chip Memory Maps .....	29
4.2 Logical vs. Physical Bit Identification .....	35
4.3 Memory Banks .....	35
4.3.1 Reserved Memory .....	35
4.3.2 Passwords.....	35
4.3.3 EPC Memory (EPC data, Protocol Control Bits, and CRC16) .....	35
4.3.4 Tag Identification (TID) Memory .....	36

<b>5</b>	<b>Absolute Maximum Ratings .....</b>	<b>37</b>
5.1	Temperature .....	37
5.2	Electrostatic Discharge (ESD) Tolerance.....	38
5.3	NVM Use Model.....	38
<b>6</b>	<b>Ordering Information .....</b>	<b>39</b>
<b>7</b>	<b>Notices.....</b>	<b>40</b>

# 1 Introduction

## 1.1 SCOPE

This datasheet defines the physical and logical specifications for Gen 2-compliant Monza 4 tag silicon, a reader-talks-first, radio frequency identification (RFID) component operating in the UHF frequency range.

## 1.2 REFERENCE DOCUMENTS

*EPC™ Radio Frequency Identity Protocols Class-1 Generation-2 UHF RFID Protocol for Communications at 860 MHz – 960 MHz (Gen 2 Specification)*

The conventions used in the Gen 2 Specification (normative references, terms and definitions, symbols, abbreviated terms, and notation) were adopted in the drafting of this Monza 4 Tag Chip Datasheet. Users of this datasheet should familiarize themselves with the Gen 2 Specification.

*Impinj Monza Wafer Assembly Specification*

*Impinj Monza Wafer Map Orientation*

*GS1 EPC™ Tag Data Standards Specification*

*EPCglobal “Interoperability Test System for EPC Compliant Class-1 Generation-2 UHF RFID Devices” v.1.2.4, August 4, 2006*

(Monza 4 tag chips are compliant with this Gen 2 interoperability standard.)

## 2 Functional Description

The Monza 4 tag chip family fully supports all requirements of the Gen 2 specification as well as many optional commands and features (see Section 2.5 below). In addition, the Monza 4 tag chip family introduces a number of enhancements over previous generation chips on the market:

- Superior sensitivity yields highly improved performance, read/write range/reliability, and write rate
- Impinj patented True3D™ antenna technology enables smaller, less expensive tags with better performance, and supports orientation insensitivity without compromised performance
- Impinj patented QT™ technology provides additional options for data protection, giving the user the ability control access to business-sensitive data
- Increased memory size options and in some models, the ability to permanently lock individual blocks of memory provide added flexibility
- Monza 4i enables component-level tagging in vehicle and production line manufacturing, with an extended memory to track long serial numbers and chronicle the production process and components from raw material through final assembly
- Custom, yet fully Gen 2 compliant S1 flag refresh and EPC + TID backscatter modes add more capability for previously difficult tagging applications

### 2.1 TRUE3D ANTENNA TECHNOLOGY IMPROVES PERFORMANCE

The Monza 4 tag chip has an architecture unlike any other chip on the market. With True3D antenna technology, two fully independent, differential inputs enable omni-directional antenna designs, eliminating orientation-related missed reads or blind spots. (See Section 3.1 for details about how to connect to these inputs.) Orientation insensitivity is particularly important in item-level applications and in situations where handheld readers are the norm.

For item-level tags, variability in orientation can be too great to overcome easily. For example, in a retail apparel application, the variety of ways an RFID tag on a garment might lay with respect to a reader are endless: folded on a shelf, hanging on a rack, boxed in the backroom, crumpled on the floor in the changing room, etc. To expect this tag to always have a particular orientation that facilitates reading is not realistic. In such cases, true omni-directional tag designs are paramount to successful data capture.


With the Monza 4 tag chip architecture, this type of orientation indifference is possible. To illustrate the difference between conventional tag chips and the Monza 4, examining their read range responses is useful.

Figure 2-1 provides a read range response plot for a conventional Monza 4 single-port tag using a dipole antenna configuration, not utilizing True3D. Any single port tag, even using the best chip and innovative antenna design, will have a deficiency somewhere in its pattern. While the tag depicted in Figure 2-1 has excellent broadside performance, there are certain angles where a tag is less visible to a reader.

With the previous generation Monza tag chip, clever antenna design that took advantage of its dual input structure helped to remove the blind spots, or nulls (see Figure 2-2), but came at the cost of a compromise in long-range performance.

Figure 2-3 provides a read range response pattern for a tag using a Monza 4 tag chip. Compare Figure 2-3 to Figure 2-2. Notice that the response patterns in the Monza 4-based tag (Figure 2-3) are close to circular—no angle has significantly lower sensitivity than any other. And at every angle, the read range has increased.

With Monza 4 and True3D antenna technology, users achieve orientation insensitivity as well as excellent performance.

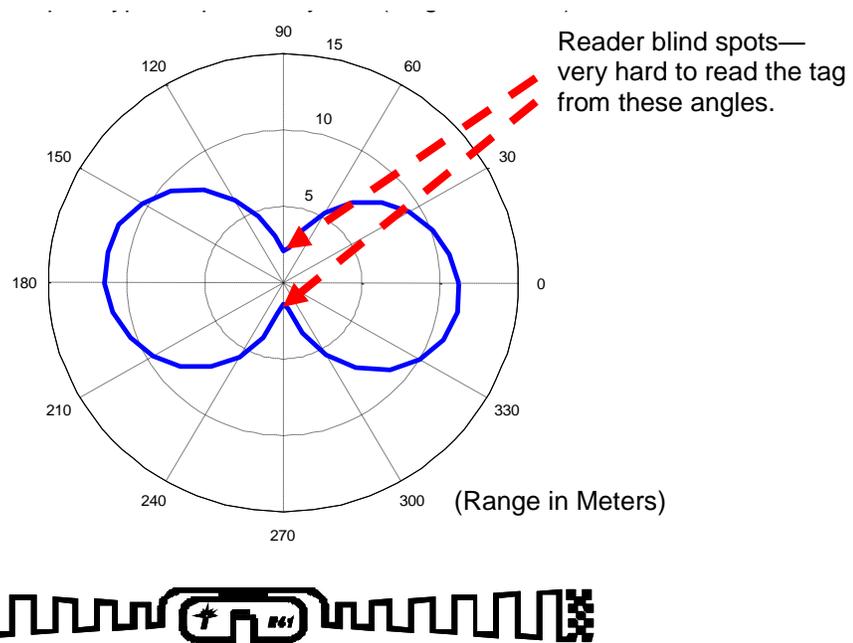

**Figure 2-1 Read Range for Monza 4-based, 95 x 8 mm Dipole Tag (Impinj Reference E41)**




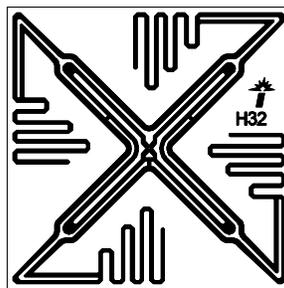


Figure 2-2 Read Range for Monza 3-Based, 46 mm<sup>2</sup> Tag (Impinj Reference H32)

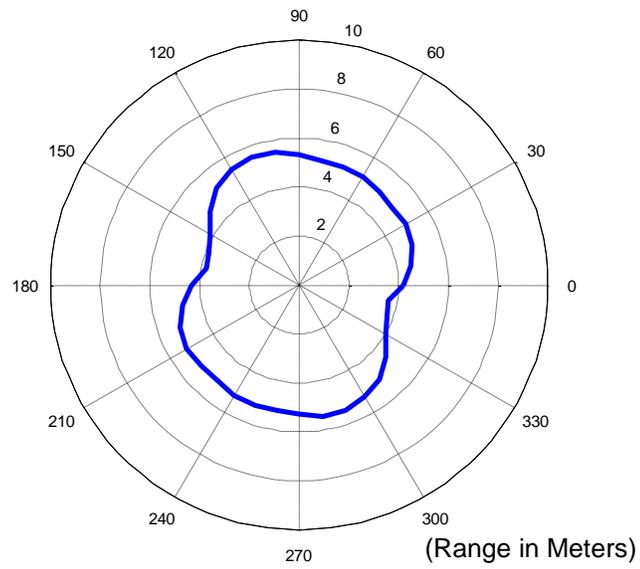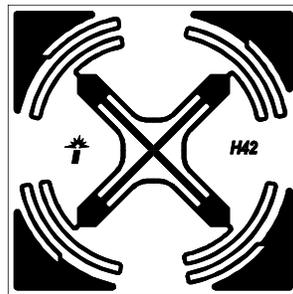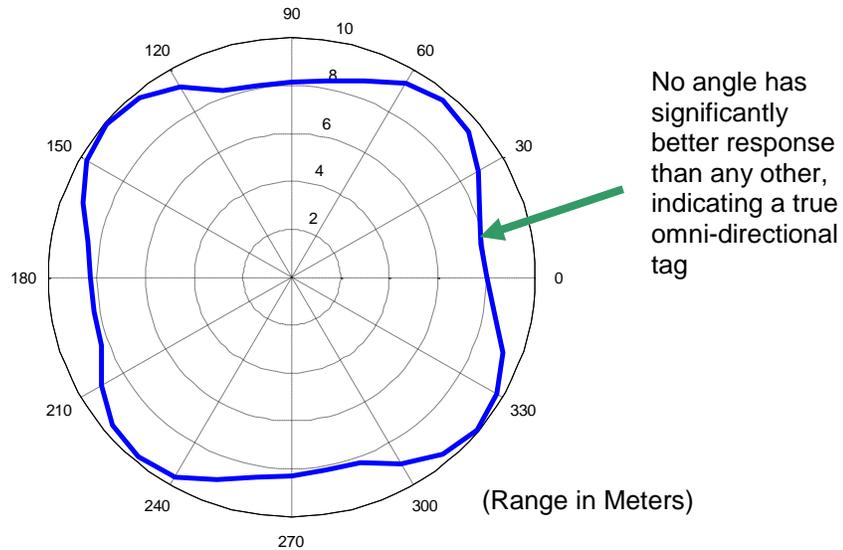

**Figure 2-3 Read Range for Monza 4-Based, 46 mm<sup>2</sup> Tag (Impinj Reference H42)**

Figure 2-3 shows how True3D antenna technology provides orientation insensitivity and excellent performance.

## 2.2 QT TECHNOLOGY—PRIVATE, PUBLIC, PEEK, AND SHORT RANGE

Through QT technology, a tag owner/user can maintain two data profiles (one public, one private), allowing confidentiality of business-sensitive data while assuring consumers of privacy. The tag owner stores confidential data in the private data profile, which is protected by a password-controlled command and may only be accessed at very short read distances.

One example where such a feature would be useful is in a supply chain for luxury goods. The manufacturer may want to include information in the tag that would provide a guarantee of authenticity, record the time and place of manufacture for guarantee purposes, or include serial numbers.

After that item is packaged for distribution, however, such details might provide a security risk. If anyone possessing a reader can determine details about what is in a particular box, high-value goods could get diverted.

The Monza 4 tag chip's unique set of features helps to solve this problem.

## 2.2.1 PRIVATE/PUBLIC PROFILES

The **Private/Public** profile capability, available in Monza 4QT tag chips, provides two memory configurations (i.e., profiles) in a single chip—one **Private** and one **Public**. A Monza 4QT chip only exposes a single profile at a time. Figure 2-4 shows the chip's memory configuration when in the **Private** profile. The EPC memory typically contains an item serial number. The User memory might hold detailed information about the item. The TID memory, which includes a 32 bit base TID, a 16 bit extended TID header, and a 48 bit serial number, uniquely identifies the Monza 4QT chip itself. Also included in TID memory is a 96 bit Public EPC, which is field-writeable by a user. In typical applications, the user writes a Public EPC value into this memory location then “publicizes” the tag. Although users are free to encode as little or as much information into this 96 bit Public EPC field as they chose (including no information at all), Impinj recommends certain usage guidelines to prevent these 96 bit Public EPCs from colliding with other tags. See section 2.2.5 for Impinj's recommended usage guidelines.

At any point in the supply chain, for example at point-of-sale, users have the ability to switch QT tags to the **Public** profile. Figure 2-5 illustrates this profile. Once switched, the tag conceals its 128 bit EPC (EPC\_Private), User Memory, 16 bit TID header, and 48 bit serial number. The tag exposes its Public EPC in EPC memory, remapped from its prior location in TID memory. When the tag is singulated, it sends this 96 bit public EPC. The only other information available to a reader is the 32 bit base TID. All other private memory contents appear non-existent to a reader reading the tag.

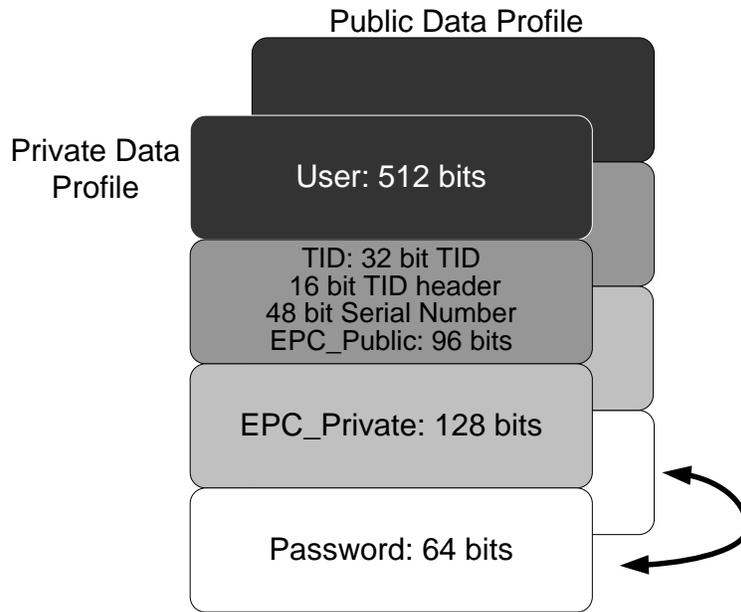


Figure 2-4 Monza 4QT Tag Chip Private Data Profile

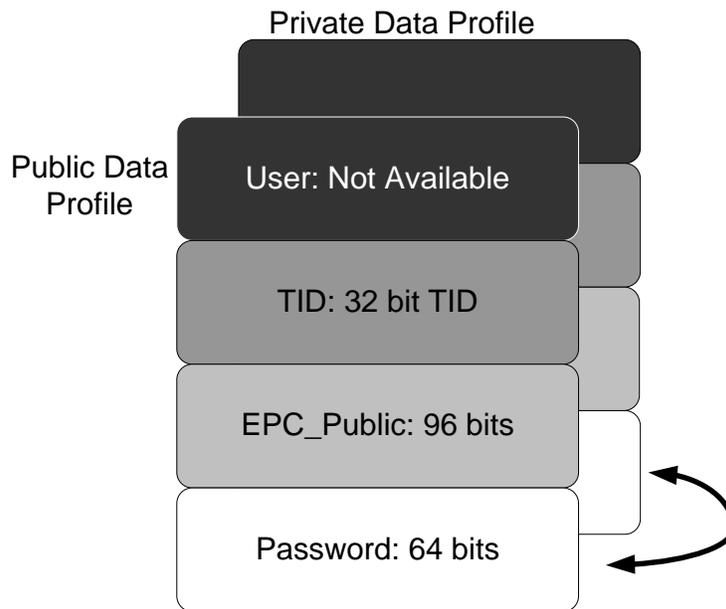


Figure 2-5 Monza 4QT Tag Chip Public Data Profile

The Private/Public profile features of the Monza 4QT tag chip are controlled by the QT command. Tags may be switched from Private profile to Public profile and back again, using the QT command. This QT command can be protected by a Short-Range Feature, by the tag's access password, or by both. See Section 2.2.2.

## 2.2.2 PUBLIC/PRIVATE PROFILE PROTECTION

To secure the Private profile tag data, Monza 4QT chips offer a **Short-Range** feature. The Short-Range feature adds a layer of physical security by preventing readers farther than roughly one meter from the tag from switching the tag from Public to Private (or vice versa).

When Short Range is enabled, the tag reduces its sensitivity in the OPEN and SECURED states by about 15 dB. The tag has normal sensitivity during singulation. However, before transitioning to the OPEN or SECURED states, the tag checks the RF power level—if it is above the short-range threshold then the tag will enter the OPEN or SECURED state, otherwise the tag will reset back to the READY state. The QT command is only available when a tag is in the SECURED state, so this power check effectively prevents the tag from accepting a QT command at long range.

A reader is always able to read a tag's currently exposed EPC (EPC\_Public or EPC\_Private, as appropriate for the current profile) at maximum range. However, when the Short-Range feature is enabled, a reader at long range that attempts to switch the tag's profile (for example, from Public to Private to read the tag's User memory) will see the tag lose power and drop out of its dialog with the reader. This short-range feature ensures that the information the tag's rightful owner wants to protect is not readable unless the tag is close to a reader antenna.

As a further layer of protection, the Access command defined in the Gen 2 specification is fully operable for QT-enabled tags. If the tag's Access password is nonzero, a reader must provide this password before the tag will transition to the SECURED state. Because the QT command is only operable from the SECURED state, the Access password provides a secure mechanism against unauthorized readers issuing a QT command. In short, a QT tag can use physical protection (Short Range), logical protection (Access password) or both to prevent unauthorized access.

The Short Range feature is controlled by the QT command. (See Table 2-1 through Table 2-3.) The specific bit that controls the Short Range mode is the QT\_SR bit described in Table 2-3.

### 2.2.3 PEEK

What would happen if a Public tag is switched to Private by an authorized user, for example to read User memory, and inadvertently left in the Private mode? In this situation, the tag could compromise its Private data. To help prevent this situation, Monza 4QT tag chips offer a **Peek** feature. With Peek, a reader can temporarily switch a Public tag to Private, access the Private information, then when the chip loses power it will automatically revert to its Public profile. Peek is controlled by the persistence bit in the QT command—to implement a Peek, set the Persistence bit to 0 in the QT command. See Table 2-2 for details.

### 2.2.4 QT COMMAND FORMAT

Table 2-1, Table 2-2, and Table 2-3 provide details about the custom Impinj QT command.

**Table 2-1 QT Command Code**

COMMAND	CODE	LENGTH (BITS)	DETAILS
QT	1110000000000000	68	<ul style="list-style-type: none"> <li>The QT command controls the switching of Monza 4QT between the Private and Public profiles</li> <li>The tag must be in the SECURED state to transition to the memory indicated by the command</li> <li>If a tag receives a QT command with an invalid handle, it ignores that command</li> <li>The tag responds with the Insufficient Power error code if the power check fails on write</li> <li>The tag responds with the Other error code if the write times out</li> </ul>

**Table 2-2 QT Command Details**

QT COMMAND	CODE	READ/WRITE	PERSISTENCE	RFU	PAYLOAD	RN	CRC-16
<b>#bits</b>	16	1	1	2	16	16	16
<b>Details</b>	1110000000000000	0: Read 1: Write	0: Temporary 1: Permanent	00 <sub>b</sub>	QT Control	handle	

Table 2-3 QT Command Field Descriptions

FIELD	DESCRIPTION		
<b>Read/Write</b>	<ul style="list-style-type: none"> <li>The Read/Write field indicates whether the tag reads or writes QT control data.</li> <li>Read/Write=0 means read the QT control bits in cache.</li> <li>Read/Write=1 means write the QT control bits</li> </ul>		
<b>Persistence</b>	<ul style="list-style-type: none"> <li>If Read/Write=1, the Persistence field indicates whether the QT control is written to nonvolatile (NVM) or volatile memory.</li> <li>Persistence=0 means write to volatile memory.</li> <li>Persistence=1 means write to NVM memory</li> </ul>		
<b>RFU</b>	<ul style="list-style-type: none"> <li>These bits are reserved for future use and will be ignored by Monza 4</li> </ul>		
<b>Payload (QT Control)</b>	<ul style="list-style-type: none"> <li>This field controls the QT functionality. These bits are ignored when the Read/Write field equals 0.</li> <li>Bit 15 (MSB) is first transmitted bit of the payload field.</li> </ul>		
	BIT #	NAME	DESCRIPTION
	15	QT_SR	1: Tag reduces range if in or about to be in OPEN or SECURED state 0: Tag does not reduce range
	14	QT_MEM	1: Tag uses Public Memory Map (see Table 2-10) 0: Tag uses Private Memory Map (see Table 2-9)
13:0		Reserved for future use. Tag will return these bits as zero.	
<b>RN</b>	<ul style="list-style-type: none"> <li>The tag will ignore any QT command received with an invalid handle</li> </ul>		

The tag response to the QT Command with Read/Write = 0 uses the preamble specified by the TRext value in the Query command that initiated the round. See Table 2-4 for read response details.

Table 2-4 Tag Response to QT Read Command

	HEADER	DATA	RN	CRC-16
<b>#bits</b>	1	16	16	16
<b>Description</b>	0	QT Control	handle	

The tag response to the QT Command with Read/Write =1 uses the extended preamble. See Table 2-5 for write response details. Note that a reader should not presume that a tag has properly executed a QT Write command unless and until it receives the response shown in Table 2-5 from the tag.

**Table 2-5 Tag Response to a Successful QT Write Command**

	HEADER	RN	CRC-16
#bits	1	16	16
Description	0	Handle	

## 2.2.5 RECOMMENDED PUBLIC EPC USAGE GUIDELINES

The GS1 EPC Tag Data Standards specifies the general structure of the EPC data field (for the latest version of this standard, visit <http://www.gs1.org/epc/tag-data-standard>). If tag users wish to have the Public EPC hold information in any of the currently defined formats (e.g., SGTIN-96), they should follow this specification.

For any other use of this data field, tag users must take care not to create content that conflicts with the standard. For example, a retailer should not set the MSBs to “0011 0000” because that could be interpreted as an SGTIN-96-tagged item.

To create Public EPCs that do not conflict with already defined usage, Impinj recommends the following (also see Table 2-6):

- The first 8 bits of header should always be zero to avoid conflict with already standardized EPC formats.
- The next 32 bits should hold a Private Enterprise Number (PEN) (number obtainable from the Internet Assigned Numbers Authority (IANA) at <http://pen.iana.org/pen/app>) that uniquely identifies a company or organization. If tag users do not wish to have even this level of identification (i.e., they desire full privacy), the PEN should be set to all zeros.
- The last 56 bits hold data fields specified by each entity for their application.

**Table 2-6 Recommended Format for Public EPC Contents**

HEADER (00000000)	PRIVATE ENTERPRISE NUMBER (32 BITS)	DATA FIELDS (56 BITS)
----------------------	--	--------------------------

### 2.2.5.1 EXAMPLE PUBLIC EPC USE CASE—RETAIL ENVIRONMENT

After a sale, a retailer might conceal any proprietary information available in the EPC\_Private memory by switching the tag to the Public profile. But they still need a means of verifying that a particular item came from their company to support return logistics. And to avoid consumer privacy concerns, any information entered into the EPC\_Public memory must not be unique.

By setting up a format such as that shown in Table 2-7, the retailer has sufficient information to support returns, verify that the item came from their company, determine the type of return, and identify stolen merchandise without having such unique numbers that a consumer's privacy is at risk.

Note: This format is for illustration purposes only. Tag users should consult the EPC Tag Data Standard when designing their format to ensure compliance.

**Table 2-7 Example EPC\_Public Format—Retail Case**

HEADER (8 BITS)	PEN (32 BITS)	MODE (8 BITS)	STORE NUMBER (16 BITS)	DATE CODE (32 BITS)	COMMENT
00 <sub>h</sub>	0000 0000 <sub>h</sub>	00 <sub>h</sub>	0000 <sub>h</sub>	0000 0000 <sub>h</sub>	Full Privacy Mode
00 <sub>h</sub>	0000 0192 <sub>h</sub>	01 <sub>h</sub>	000F <sub>h</sub>	00C1 F7DA <sub>h</sub>	Store Return
00 <sub>h</sub>	0000 0192 <sub>h</sub>	02 <sub>h</sub>	000F <sub>h</sub>	00A1 07DA <sub>h</sub>	Store Return, Password Required
00 <sub>h</sub>	0000 0192 <sub>h</sub>	03 <sub>h</sub>	000F <sub>h</sub>	FFFF FFFA <sub>h</sub>	Date Field Coded to Indicate that Item Was Not Sold

## 2.3 INCREASED MEMORY OPTIONS

Tag users have asked for increased memory in RFID tag chips, and the Monza 4 family offers a variety of options. See Table 2-8. For detailed memory maps, see Section 0 below. The extended User memory option supports applications where users cannot count on a database connection. The 512 bits of User memory enables a portable, but private database to travel with the tag. The Extended EPC memory option enables compliance with regional and industry-segment mandates that require more than 96 bit EPC numbers, as well as provides a faster access form of memory. The Industrial/Automotive Application Focused Option offers capabilities to leverage data logging.

Table 2-8 Monza 4 Memory Options

MODEL	USER MEMORY	EPC MEMORY	TRUE3D ANTENNA TECHNOLOGY	SERIALIZED TID	QT TECHNOLOGY
Monza 4QT	512	128 <sup>1</sup>	✓	✓	✓
Monza 4E	128	496 <sup>1</sup>	✓	✓	–
Monza 4D	32	128 <sup>1</sup>	✓	✓	–
Monza 4i	480	256 <sup>1</sup>	✓	✓	–

Note 1: The EPC is factory encoded with 96 bits to ensure backward compatibility with older readers. Users must encode Monza 4 tag chips above 96 bits.

### 2.3.1 EXTENDED USER MEMORY OPTION

Impinj offers a version of Monza 4 (Monza 4QT) with 512 bits of user memory, 128 bits of EPC memory, and a serialized TID. See Table 2-9.

In addition to the increased memory size, Monza 4QT tag chips offer the ability to independently lock four fixed, 128-bit sections of user memory (BlockPermalock). This feature is particularly useful for situations such as in a supply chain, where various participants along the chain may want to record data, but not necessarily have it be openly available to all parties.

Table 2-9 Monza 4QT (Private Mode) Memory Organization

MEMORY SECTION	DESCRIPTION
User	512 bits
TID (not changeable)	Serial Number—48 bits
	Extended TID Header—16 bits
	Company/Model Number—32 bits
EPC_Public	96 bits
EPC_Private	128 bits
Passwords	Kill/Access—64 bits

**Table 2-10 Monza 4QT (Public Mode) Memory Organization**

MEMORY SECTION	DESCRIPTION
TID (not changeable)	Company/Model Number—32 bits
EPC_Public	96 bits
Passwords	Kill/Access—64 bits

### 2.3.2 EXTENDED EPC MEMORY OPTION

Because of the way the protocol works, data stored in user memory requires multiple steps to access. For situations where memory must be accessed with some degree of speed, a larger User memory may not meet access speed requirements. To provide larger memory with the type of throughput required by some applications as well as meet the needs of applications requiring greater than 96 bit EPC numbers, Impinj also offers a variant of the Monza 4 tag chip with increased EPC memory. See Table 2-11.

**Table 2-11 Monza 4E Memory Organization**

MEMORY SECTION	DESCRIPTION
User	128 bits
TID (not changeable)	Serial Number—48 bits
	Extended TID Header—16 bits
	Company/Model Number—32 bits
EPC	496 bits
Passwords	Kill/Access—64 bits

### 2.3.3 BASIC MEMORY OPTION

For applications where large memory is not required, the Monza 4D offers the superior sensitivity, True3D antenna support and unique TID with a more standard memory size. See Table 2-12.

**Table 2-12 Monza 4D Memory Organization**

MEMORY SECTION	DESCRIPTION
User	32 bits
TID (not changeable)	Serial Number—48 bits
	Extended TID Header—16 bits
	Company/Model Number—32 bits
EPC	128 bits
Passwords	Kill/Access—64 bits

### 2.3.4 INDUSTRIAL/AUTOMOTIVE APPLICATION FOCUSED OPTION

Impinj offers a version called Monza 4i that is specifically targeted for industrial applications that require a moderately sized EPC along with large amount of user memory. The Monza 4i tag chip offers capabilities to leverage data logging to track, monitor, time-stamp, and record item maintenance, component status, and environmental conditions, ensuring the historical record of the item is factual and true.

Monza 4i is also ideal for automotive markets to track extended serial numbers such as a Vehicle Identification Number. It can be used effectively in the following two major usages for automotive applications:

- Manufacturing control: quality checks for vehicle parts in assembly line, data is written in every production step.
- Logistics for finished vehicles: check condition of car parts like gear boxes, bumpers, airbags, dashboards, etc.

Monza 4i includes 480 bit User Memory and 256 EPC and provides all the standard features of the Monza 4 family of tag chips. See Table 2-13. In addition, Monza 4i tag chips offer the ability to independently lock four fixed sections of user memory (BlockPermalock). This feature is particularly useful for situations such as in a supply chain, where various participants along the chain may want to record data, but not necessarily have it be openly available to all parties.

**Table 2-13 Monza 4i Memory Organization**

MEMORY SECTION	DESCRIPTION
User	480 bits
TID (not changeable)	Serial Number—48 bits
	Extended TID Header—16 bits
	Company/Model Number—32 bits
EPC	256 bits
Passwords	Kill/Access—64 bits

## 2.4 ADVANCED MONZA FEATURES SUPPORT MORE EFFECTIVE INVENTORY

Monza tag chips support two unique features designed to boost inventory performance for traditional EPC and TID-based applications:

- TagFocus™ mode minimizes redundant reads of strong tags, allowing the reader to focus on weak tags that are typically the last to be found. Using TagFocus, readers can suppress previously read tags by indefinitely refreshing their S1 B state.
- FastID™ mode makes TID-based applications such as authentication practical by boosting TID-based inventory speeds by 2 to 3 times. Readers can inventory both the EPC and the TID without having to perform an access command. Setting the EPC word length to zero enables TID-only serialization. FastID is support by all Monza 4 tag chips except for Monza QT in public mode and Monza 4E.

## 2.5 SUPPORT FOR OPTIONAL GEN 2 COMMANDS

Monza 4 tag chips support the optional commands listed in Table 2-14.

**Table 2-14 Supported Optional Gen 2 Specification Commands**

COMMAND	CODE	LENGTH (BITS)	DETAILS
Access	11000110	56	
BlockWrite	11000111	>57	<ul style="list-style-type: none"> <li>• Accepts valid one-word commands</li> <li>• Accepts valid two-word commands if pointer is an even value</li> <li>• Returns error code (00000000<sub>2</sub>) if it receives a valid two-word command with an odd value pointer</li> <li>• Returns error code (00000000<sub>2</sub>) if it receives a command for more than two words</li> <li>• Does not respond to block write commands of zero words</li> </ul>
BlockPermalock	11001001	>66	<ul style="list-style-type: none"> <li>• User Memory in Monza 4QT (in Private mode) and Monza 4i only (see Table 2-15 and Table 2-16 for details)</li> <li>• Ignored by Monza 4E, Monza 4D, and Monza 4QT (in Public mode)</li> </ul>


**Table 2-15 Monza 4QT (Private mode) BlockPermalock blocks**

USER MEMORY BIT ADDRESS RANGE	BLOCKS
384 - 511	BLOCK 3 (128 bits)
256 - 383	BLOCK 2 (128 bits)
128 - 255	BLOCK 1 (128 bits)
0 - 127	BLOCK 0 (128 bits)

**Table 2-16 Monza 4i BlockPermalock blocks**

USER MEMORY BIT ADDRESS RANGE	BLOCKS
384 - 479	BLOCK 3 (96 bits)
256 - 383	BLOCK 2 (128 bits)
128 - 255	BLOCK 1 (128 bits)
0 - 127	BLOCK 0 (128 bits)

## 2.6 MONZA 4 TAG CHIP BLOCK DIAGRAM

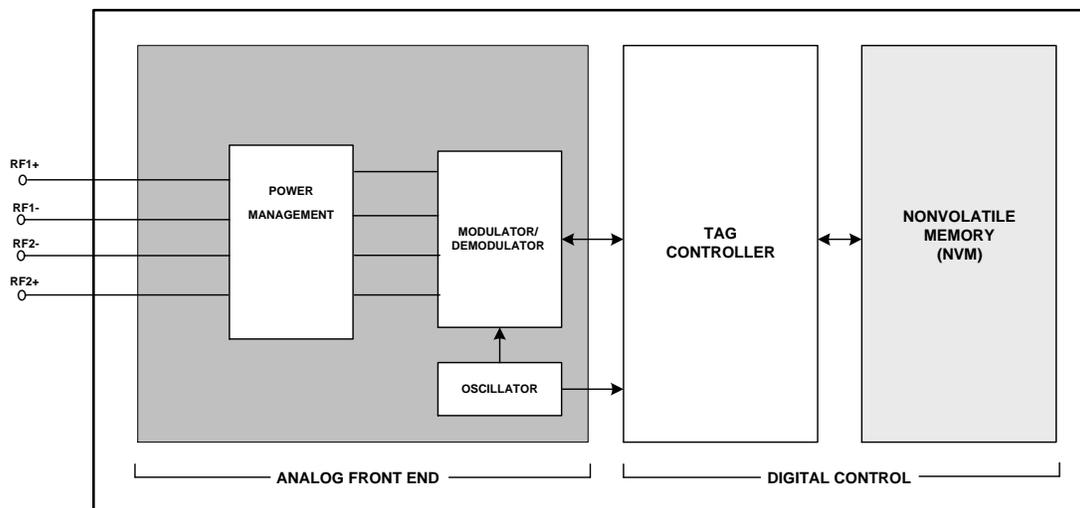

**Figure 2-6 Block Diagram**

## 2.7 PAD DESCRIPTIONS

Monza 4 tag chips have four external pads available to the user: RF1+, RF1-, RF2+, and RF2-, which are two fully independent, differential antenna ports (with one positive and one negative input pad each), as shown in Table 2-17 (see also Figure 2-6, and Figure 2-7). Note that none of these pads connects to the chip substrate.

**Table 2-17 Pad Descriptions**


EXTERNAL SIGNALS	EXTERNAL PAD	DESCRIPTION
RF1+	1	Differential RF Input Pads for Antenna 1, which are isolated from the RF Input Pads for Antenna 2
RF1-	1	
RF2+	1	Differential RF Input Pads for Antenna 2, which are isolated from the RF Input Pads for Antenna 1
RF2-	1	

## 2.8 DUAL ANTENNA INPUT

All interaction with the Monza 4 tag chip, including generation of its internal power, air interface, negotiation sequences, and command execution, occurs via its two differential antenna ports. The dual antenna ports enable antenna design diversity, which in turn minimizes a tag's orientation sensitivity, particularly when the two antennas are of different types (e.g., a combination of loop and dipole) or are otherwise oriented on different axes (X-Y). The dual antenna port configuration also enables increased read and write ranges.

The two antenna ports operate independently. The power management circuitry receives power from the electromagnetic field induced in the pair, and the demodulator exploits the independent antenna connections, combining the two demodulated antenna signals for processing on-chip.

Monza 4 tag chips may also be configured to operate using a single antenna port by simply connecting just one of the two antenna ports. The unused port should be left to float.

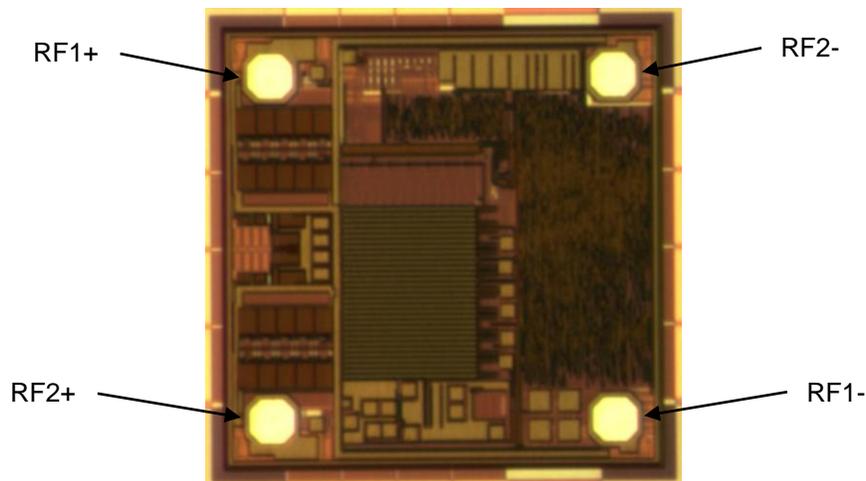

**Figure 2-7 Monza 4 tag chip die orientation**

## 2.9 MONZA 4 ANTENNA REFERENCE DESIGNS

All Monza 4 tag chips (Monza 4QT, Monza 4E, Monza 4D and Monza 4i) are designed to be drop-in compatible for antenna inlay designs. Impinj has a set of reference designs available for use by Monza customers under terms of the Impinj Antenna License Agreement.

These reference designs are available here:

<https://support.impinj.com/hc/en-us/sections/200454558-Monza-Reference-Design-Documents-Downloads>

These documents are restricted. To gain access if these documents cannot be accessed, submit a request for access using the following link. Make sure to select the option “Monza Antenna Reference Designs”.

<https://access.impinj.com/prtlaccessrequest>

## 2.10 MONZA 4 TAG CHIP DIMENSIONS

The Monza 4 features a 590  $\mu\text{m}$  x 590  $\mu\text{m}$  square die size.

## 2.11 POWER MANAGEMENT

The tag is activated by proximity to an active reader. When the tag enters a reader’s RF field, the Power Management block converts the induced electromagnetic field to the DC voltage that powers the chip.

## 2.12 MODULATOR/DEMODULATOR

The Monza 4 tag chip demodulates any of a reader’s three possible modulation formats, DSB-ASK, SSB-ASK, or PR-ASK with PIE encoding. The tag communicates to a reader via backscatter of the incident RF waveform by switching the reflection coefficient of its antenna pair between reflective and absorptive states. Backscattered data is encoded as either FM0 or Miller subcarrier modulation (with the reader commanding both the encoding choice and the data rate).

## 2.13 TAG CONTROLLER

The Tag Controller block is a finite state machine (digital logic) that carries out command sequences and also performs a number of overhead duties.

## 2.14 NONVOLATILE MEMORY

Monza 4 tag chip embedded memory is nonvolatile memory (NVM) cell technology, specifically optimized for exceptionally high performance in RFID applications. All programming overhead circuitry is integrated on chip. Monza 4 tag chip NVM provides 100,000 cycle endurance/50-year data retention.

The NVM block is organized into three segments:

- User memory (32, 128, 480, or 512 bits depending on model)

- EPC Memory (128, 256, or 496 bits, depending on model)
- Reserved Memory (which contains the Kill and Access passwords).


The ROM-based Tag Identification (TID) memory contains the EPCglobal class ID, the manufacturer identification, and the model number. For Monza 4, it also contains an extended TID consisting of a 16-bit header and 48-bit serialization.

## 3 Interface Characteristics

This section describes the RF interface of the tag chip and the modulation characteristics of both communication links: reader-to-tag (Forward Link) and tag-to-reader (Reverse Link).

### 3.1 MAKING CONNECTIONS


The Monza 4 family of tag chips takes advantage of Impinj's patented rectifier technology to implement dual, independent ports. A port is defined between a pair of pads: the RF1+ and RF1- pair together forming Port 1 and the RF2+ and RF2- pair forming Port 2. A conceptual diagram of the RF front-end is shown in Figure 3-1. The two ports have identical electrical properties. See section 3.1.4 for the target source impedance recommended by Impinj for best operation.

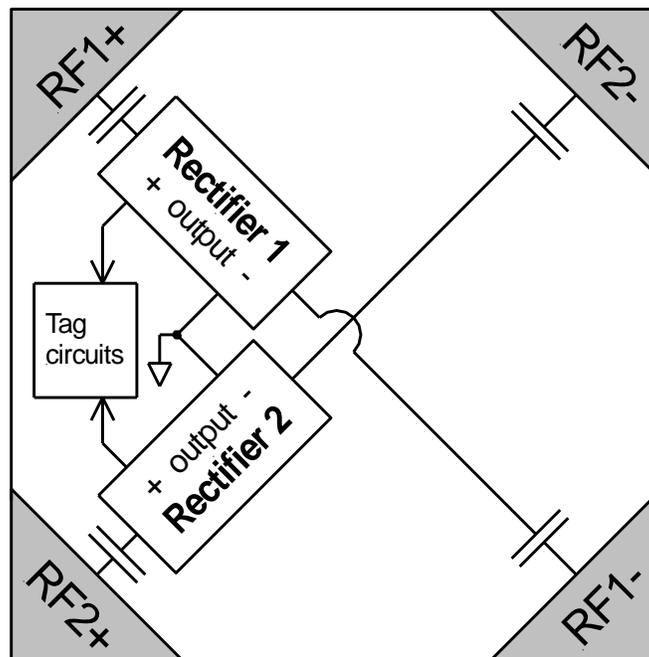

**Figure 3-1 Conceptual model of dual independent ports**


#### 3.1.1 SINGLE-PORT CONNECTION OPTION

In the single-port configuration, the signal is applied to just one of the Monza 4 antenna ports. The antenna connects to a diagonal pair of pads and the remaining, unused pads are electrically isolated from the active traces. Figure 3-2 shows two examples of Impinj near-field antennas (Button and Blade) designed for connection in this fashion. The single-port configuration is common for near-field tag antennas and for very small or very thin antennas. It is not possible, however, to achieve true orientation insensitivity with a single port.

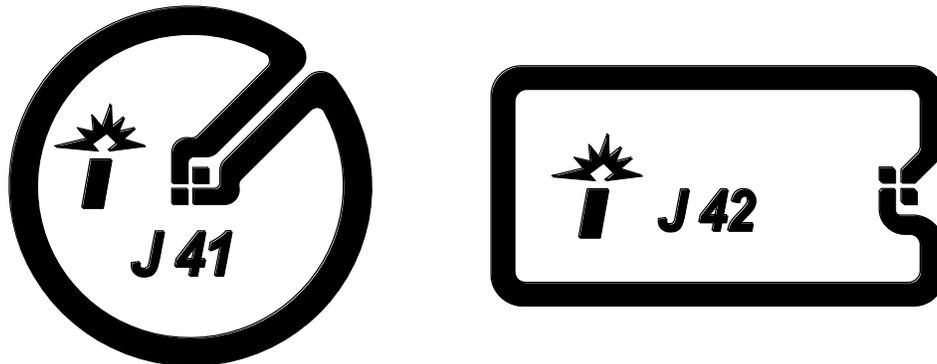

**Figure 3-2 Antennas designed for a single-port connection. Button antenna (Left) and Blade antenna (Right), with antenna trace connections to diagonal pads of Monza 4.**

The single-port configuration allows the chip to be mounted to the antenna at any 90 degree increment of rotation, as all four possible placements produce a valid connection between the antenna terminals and one of the Monza 4 ports. Because the two ports are electrically identical, there is no preferred orientation. The valid connections are shown in Figure 3-3, where the pad locations filled in black are those that are connected to the antenna traces. The dashed lines represent the electrical connections within the chip. For contrast, the figure also illustrates an adjacent pad connection, which is acceptable for some Impinj tag chips but not for Monza 4.

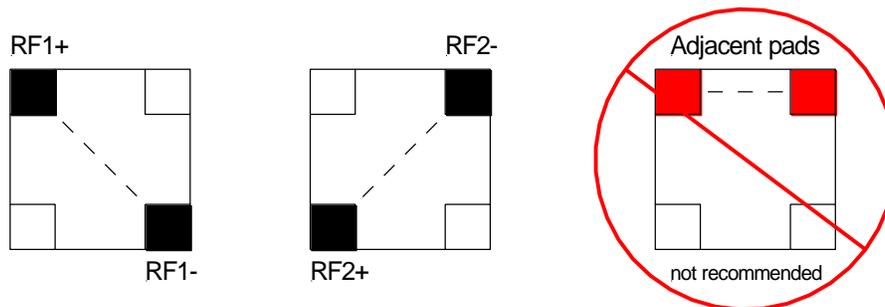


**Figure 3-3 Chip/antenna connection possibilities for single-port configuration**

### 3.1.2 SHUNTED-PORT CONNECTION OPTION

In some rare circumstances, the antenna designer may find benefit in having a higher input capacitance. One example is in the design of very small, near-field antennas. The standard single-port connection presents a capacitance that resonates with a loop of approximately 12 mm diameter in a near-field tag such as the Button. If an application calls for a smaller tag, it is possible to employ the shunted-port connection to increase the input capacitance and reduce the loop size. This configuration, illustrated in Figure 3-4, energizes both ports


simultaneously and loads the antenna with approximately twice the capacitance of a single port. A conductor loop with a diameter of about 7 to 8 mm is resonant with the shunted-port capacitance. This configuration incurs a slight (0.5 dB) efficiency penalty with corresponding loss in sensitivity compared to the single-port configuration, so it should be reserved for situations that mandate a very small tag.

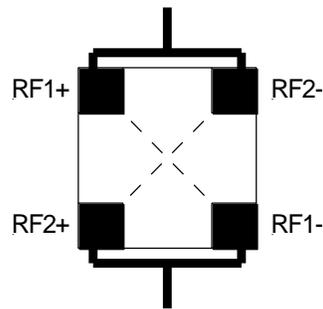

**Figure 3-4 Chip/antenna connection for shunted-port configuration**

### 3.1.3 DUAL-PORT CONNECTION OPTION

The advanced capabilities of Monza 4 really shine with a dual-port connection. This configuration is the focus of the True3D technology that enables high-readability, orientation-insensitive tags. One of the fundamental principles for achieving such high levels of performance is *symmetry by design*. The ports of Monza 4 have an inherent electrical symmetry along both diagonal axes of the chip. A good antenna that extends that symmetry out to a larger geometry and into its resonant modes is ideal for realizing True3D. An example of geometry that exhibits symmetry by design is shown in Figure 3-5.

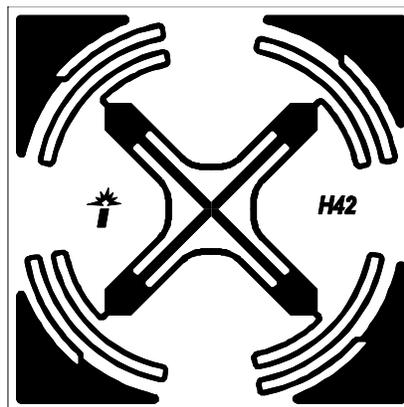

**Figure 3-5 Antenna design for dual-port connection. The geometry is formed by rotating and copying a one-quadrant “primitive,” resulting in rotational symmetry.**

Symmetry in design leads to an electrical symmetry that minimizes the interaction between the two ports. Therefore, the antenna impedance at one port is independent of the load on the other port, and the design can proceed in a straightforward manner using the single-port antenna impedance recommendations. These recommendations are applied across one of the diagonal pairs of antenna pads and are guaranteed by design to apply to the other pair.

### 3.1.4 SOURCE IMPEDANCE

Table 3-1 shows the chip port impedances for Monza 4 tag chips across center frequencies of the primary regions of operation (North America, Europe, and Japan) for the single port configuration.

Table 3-1 Chip Port Impedances

PARAMETER		TYPICAL VALUE	COMMENTS
Intrinsic Capacitance <sup>1</sup>		1000 fF	Measured on bare die between pads RF1+ and RF1-, or between pads RF2+ and RF2-
<b>Single-port connection</b>			
Chip Load Model		1650 $\Omega$    1.21 pF	Linearized model of chip port, including typical mounting capacitance
Conjugate Match Impedance	866 MHz	13 + j151 $\Omega$	Complex conjugate of Chip Load Model at specified frequency, expressed as an impedance
	915 MHz	11 + j143 $\Omega$	
	956 MHz	10 + j137 $\Omega$	
Read Sensitivity		-17.4 dBm	Measured at 25 °C; R=>T link using DSB-ASK modulation with 90% modulation depth, $T_{\text{ari}}=25$ $\mu$ s, and a T=>R link operating at 256 kbps with Miller M=4 encoding.
Write Sensitivity		-14.6 dBm	
<b>Shunted-port connection</b>			
Chip Load Model		1000 $\Omega$    2.48 pF	Linearized model of chip port, including typical mounting capacitance
Conjugate Match Impedance	866 MHz	5.5 + j74 $\Omega$	Complex conjugate of Chip Load Model at specified frequency, expressed as impedance. For near field-only tag, disregard real component.
	915 MHz	4.9 + j70 $\Omega$	
	956 MHz	4.5 + j67 $\Omega$	
Read Sensitivity		-16.9 dBm	Measured at 25 °C; R=>T link using DSB-ASK modulation with 90% modulation depth, $T_{\text{ari}}=25$ $\mu$ s, and a T=>R link operating at 256 kbps with Miller M=4 encoding
Write Sensitivity		-14.1 dBm	
<b>Dual-port connection</b>			
Chip Load Model		1800 $\Omega$    1.21 pF	Ports act independently, so each port of a dual-port tag has the same impedance parameters as a single-port tag
Read Sensitivity		-19.9 dBm	Power incident at each port under conditions of equal power, arbitrary phase relation between signals
Write Sensitivity		-17.1 dBm	

Note 1: Value does not include parasitic capacitance resulting from mounting the chip onto an antenna trace. Mounting capacitance is dependent on assembly parameters and manufacturing tolerance—users should evaluate and determine the appropriate mounting capacitance for their given process.

## 3.2 READER-TO-TAG (FORWARD LINK) SIGNAL CHARACTERISTICS

**Table 3-2 Forward Link Signal Parameters**

PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNITS	COMMENTS
<b>RF Characteristics</b>					
Carrier Frequency	860		960	MHz	North America: 902–928 MHz Europe: 865–868 MHz
Maximum RF Field Strength			+20	dBm	Received by a tag with dipole antenna while sitting on a maximum power reader antenna
Short Range Sensitivity		6.0		dBm	
Tag Velocity During Write			4.5	meters/ sec	Under worst case fading conditions
<b>Modulation Characteristics</b>					
Modulation		DSB-ASK, SSB-ASK, or PR-ASK			Double and single sideband amplitude shift keying; phase-reversal amplitude shift keying
Data Encoding		PIE			Pulse-interval encoding
Modulation Depth (A-B)/A	80		100	%	
Ripple, Peak-to-Peak $M_h=M_l$			5	%	Portion of A-B
Rise Time ( $t_{r,10-90\%}$ )	0		$0.33T_{ari}$	sec	
Fall Time ( $t_{f,10-90\%}$ )	0		$0.33T_{ari}$	sec	
$T_{ari}^1$	6.25		25	$\mu$ s	Data 0 symbol period
PIE Symbol Ratio	1.5:1		2:1		Data 1 symbol duration relative to Data 0
Duty Cycle	48		82.3	%	Ratio of data symbol high time to total symbol time
Pulse Width	$MAX(0.265T_{ari},2)$		$0.525T_{ari}$	$\mu$ s	Pulse width defined as the low modulation time (50% amplitude)

Note 1: Values are nominal; they do not include reader clock frequency error.

### 3.3 REVERSE LINK SIGNAL CHARACTERISTICS

**Table 3-3 Reverse Link Signal Parameters**

PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNITS	COMMENTS
<b>Modulation Characteristics</b>					
Modulation		ASK			FET Modulator
Data Encoding		Baseband FM0 or Miller Subcarrier			
Change in Modulator Reflection Coefficient $ \Delta\Gamma $ due to Modulation		0.8			$ \Delta\Gamma  =  \Gamma_{\text{reflect}} - \Gamma_{\text{absorb}} $ (per read/write sensitivity, Table 3-2)
Duty Cycle	45	50	55	%	
Symbol Period <sup>1</sup>	1.5625		25	$\mu\text{s}$	Baseband FM0
	3.125		200	$\mu\text{s}$	Miller-modulated subcarrier
Miller Subcarrier Frequency <sup>1</sup>	40		640	kHz	

Note 1: Values are nominal minimum and nominal maximum, and do not include frequency tolerance. Apply appropriate frequency tolerance to arrive at absolute durations and frequencies.

## 4 Tag Memory

### 4.1 MONZA 4 TAG CHIP MEMORY MAPS

Table 4-1 through Table 4-5 describe the memory maps for Monza 4QT (both the Private and Public modes), Monza 4E, Monza 4D and Monza 4i.

**Table 4-1 Physical/Logical Memory Map–Monza 4QT (Private Mode)**

MEMORY BANK NUMBER	MEMORY BANK NAME	MEMORY BANK BIT ADDRESS	BIT NUMBER															
			15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
11 <sub>2</sub>	User (NVM)	1F0 <sub>h</sub> -1FF <sub>h</sub>	User[15:0]															
		1E0 <sub>h</sub> -1EF <sub>h</sub>	User[31:16]															
		...	...															
		10 <sub>h</sub> -1F <sub>h</sub>	User[495:480]															
		00 <sub>h</sub> -0F <sub>h</sub>	User[511:496]															
10 <sub>2</sub>	EPC_Public (NVM)	B0 <sub>h</sub> -BF <sub>h</sub>	EPC_Public [15:0]															
		A0 <sub>h</sub> -AF <sub>h</sub>	EPC_Public [31:16]															
		90 <sub>h</sub> -9F <sub>h</sub>	EPC_Public [47:32]															
		80 <sub>h</sub> -8F <sub>h</sub>	EPC_Public [63:48]															
		70 <sub>h</sub> -7F <sub>h</sub>	EPC_Public [79:64]															
		60 <sub>h</sub> -6F <sub>h</sub>	EPC_Public [95:80]															
	TID (ROM)	50 <sub>h</sub> -5F <sub>h</sub>	TID_Serial[15:0]															
		40 <sub>h</sub> -4F <sub>h</sub>	TID_Serial[31:16]															
		30 <sub>h</sub> -3F <sub>h</sub>	TID_Serial[47:32]															
		20 <sub>h</sub> -2F <sub>h</sub>	Extended TID Header															
		10 <sub>h</sub> -1F <sub>h</sub>	Manufacturer ID				Model Number											
		00 <sub>h</sub> -0F <sub>h</sub>	1	1	1	0	0	0	1	0	Manufacturer ID							
01 <sub>2</sub>	EPC_Private (NVM)	90 <sub>h</sub> -9F <sub>h</sub>	EPC_Private[15:0]															
		80 <sub>h</sub> -8F <sub>h</sub>	EPC_Private [31:16]															
		70 <sub>h</sub> -7F <sub>h</sub>	EPC_Private [47:32]															
		60 <sub>h</sub> -6F <sub>h</sub>	EPC_Private [63:48]															
		50 <sub>h</sub> -5F <sub>h</sub>	EPC_Private [79:64]															
		40 <sub>h</sub> -4F <sub>h</sub>	EPC_Private [95:80]															
		30 <sub>h</sub> -3F <sub>h</sub>	EPC_Private [111:96]															
		20 <sub>h</sub> -2F <sub>h</sub>	EPC_Private [127:112]															
		10 <sub>h</sub> -1F <sub>h</sub>	Protocol-Control Bits (PC)															
		00 <sub>h</sub> -0F <sub>h</sub>	CRC-16															
00 <sub>2</sub>	RESERVED (NVM)	30 <sub>h</sub> -3F <sub>h</sub>	Access Password[15:0]															
		20 <sub>h</sub> -2F <sub>h</sub>	Access Password[31:16]															
		10 <sub>h</sub> -1F <sub>h</sub>	Kill Password[15:0]															
		00 <sub>h</sub> -0F <sub>h</sub>	Kill Password[31:16]															

**Table 4-2 Physical/Logical Memory Map–Monza 4QT (Public Mode)**

MEMORY BANK NUMBER	MEMORY BANK NAME	MEMORY BANK BIT ADDRESS	BIT NUMBER															
			15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
		10h-1Fh	Manufacturer ID				Model Number											
		00h-0Fh	1	1	1	0	0	0	1	0	Manufacturer ID							
01 <sub>2</sub>	EPC_Public (NVM / Write Locked)	70h-7Fh	EPC_Public[15:0]															
		60h-6Fh	EPC_Public [31:16]															
		50h-5Fh	EPC_Public [47:32]															
		40h-4Fh	EPC_Public [63:48]															
		30h-3Fh	EPC_Public [79:64]															
		20h-2Fh	EPC_Public [95:80]															
		10h-1Fh	Protocol-Control Bits (PC)															
		00h-0Fh	CRC-16															
00 <sub>2</sub>	RESERVED (NVM / R/W Locked)	30h-3Fh	Access Password[15:0]															
		20h-2Fh	Access Password[31:16]															
		10h-1Fh	Kill Password[15:0]															
		00h-0Fh	Kill Password[31:16]															

**Table 4-3 Physical/Logical Memory Map–Monza 4E**

MEMORY BANK NUMBER	MEMORY BANK NAME	MEMORY BANK BIT ADDRESS	BIT NUMBER															
			15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
11 <sub>2</sub>	User (NVM)	70 <sub>h</sub> -7F <sub>h</sub>	User[15:0]															
		60 <sub>h</sub> -6F <sub>h</sub>	User[31:16]															
		...	...															
		10 <sub>h</sub> -1F <sub>h</sub>	User[111:96]															
		00 <sub>h</sub> -0F <sub>h</sub>	User[127:112]															
10 <sub>2</sub>	TID (ROM)	50 <sub>h</sub> -5F <sub>h</sub>	TID_Serial[15:0]															
		40 <sub>h</sub> -4F <sub>h</sub>	TID_Serial[31:16]															
		30 <sub>h</sub> -3F <sub>h</sub>	TID_Serial[47:32]															
		20 <sub>h</sub> -2F <sub>h</sub>	Extended TID Header															
		10 <sub>h</sub> -1F <sub>h</sub>	Manufacturer ID				Model Number											
		00 <sub>h</sub> -0F <sub>h</sub>	1	1	1	0	0	0	1	0	Manufacturer ID							
01 <sub>2</sub>	EPC (NVM)	200 <sub>h</sub> -20F <sub>h</sub>	EPC[15:0]															
		1F0 <sub>h</sub> -1FF <sub>h</sub>	EPC[31:16]															
		1E0 <sub>h</sub> -1EF <sub>h</sub>	EPC[47:32]															
		1D0 <sub>h</sub> -1DF <sub>h</sub>	EPC[63:48]															
		...	...															
		40 <sub>h</sub> -4F <sub>h</sub>	EPC[463:448]															
		30 <sub>h</sub> -3F <sub>h</sub>	EPC[479:464]															
		20 <sub>h</sub> -2F <sub>h</sub>	EPC[495:480]															
		10 <sub>h</sub> -1F <sub>h</sub>	Protocol-Control Bits (PC)															
		00 <sub>h</sub> -0F <sub>h</sub>	CRC-16															
00 <sub>2</sub>	RESERVED (NVM)	30 <sub>h</sub> -3F <sub>h</sub>	Access Password[15:0]															
		20 <sub>h</sub> -2F <sub>h</sub>	Access Password[31:16]															
		10 <sub>h</sub> -1F <sub>h</sub>	Kill Password[15:0]															
		00 <sub>h</sub> -0F <sub>h</sub>	Kill Password[31:16]															

**Table 4-4 Physical/Logical Memory Map–Monza 4D**

MEMORY BANK NUMBER	MEMORY BANK NAME	MEMORY BANK BIT ADDRESS	BIT NUMBER															
			15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
11 <sub>2</sub>	User (NVM)	10 <sub>h</sub> -1F <sub>h</sub>	User[15:0]															
		00 <sub>h</sub> -0F <sub>h</sub>	User[31:16]															
10 <sub>2</sub>	TID (ROM)	50 <sub>h</sub> -5F <sub>h</sub>	TID_Serial[15:0]															
		40 <sub>h</sub> -4F <sub>h</sub>	TID_Serial[31:16]															
		30 <sub>h</sub> -3F <sub>h</sub>	TID_Serial[47:32]															
		20 <sub>h</sub> -2F <sub>h</sub>	Extended TID Header															
		10 <sub>h</sub> -1F <sub>h</sub>	Manufacturer ID				Model Number											
		00 <sub>h</sub> -0F <sub>h</sub>	1	1	1	0	0	0	1	0	Manufacturer ID							
01 <sub>2</sub>	EPC (NVM)	90 <sub>h</sub> -9F <sub>h</sub>	EPC[15:0]															
		80 <sub>h</sub> -8F <sub>h</sub>	EPC[31:16]															
		70 <sub>h</sub> -7F <sub>h</sub>	EPC[47:32]															
		60 <sub>h</sub> -6F <sub>h</sub>	EPC[63:48]															
		50 <sub>h</sub> -5F <sub>h</sub>	EPC[79:64]															
		40 <sub>h</sub> -4F <sub>h</sub>	EPC[95:80]															
		30 <sub>h</sub> -3F <sub>h</sub>	EPC[111:96]															
		20 <sub>h</sub> -2F <sub>h</sub>	EPC[127:112]															
		10 <sub>h</sub> -1F <sub>h</sub>	Protocol-Control Bits (PC)															
		00 <sub>h</sub> -0F <sub>h</sub>	CRC-16															
00 <sub>2</sub>	RESERVED (NVM)	30 <sub>h</sub> -3F <sub>h</sub>	Access Password[15:0]															
		20 <sub>h</sub> -2F <sub>h</sub>	Access Password[31:16]															
		10 <sub>h</sub> -1F <sub>h</sub>	Kill Password[15:0]															
		00 <sub>h</sub> -0F <sub>h</sub>	Kill Password[31:16]															

**Table 4-5 Physical/Logical Memory Map—Monza 4i**

MEMORY BANK NUMBER	MEMORY BANK NAME	MEMORY BANK BIT ADDRESS	BIT NUMBER															
			15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
11 <sub>2</sub>	User (NVM)	1D0 <sub>h</sub> -1DF <sub>h</sub>	User[15:0]															
		1C0 <sub>h</sub> -1CF <sub>h</sub>	User[31:16]															
		...	...															
		10 <sub>h</sub> -1F <sub>h</sub>	User[463:448]															
		00 <sub>h</sub> -0F <sub>h</sub>	User[479:464]															
10 <sub>2</sub>	TID (ROM)	50 <sub>h</sub> -5F <sub>h</sub>	TID_Serial[15:0]															
		40 <sub>h</sub> -4F <sub>h</sub>	TID_Serial[31:16]															
		30 <sub>h</sub> -3F <sub>h</sub>	TID_Serial[47:32]															
		20 <sub>h</sub> -2F <sub>h</sub>	Extended TID Header															
		10 <sub>h</sub> -1F <sub>h</sub>	Manufacturer ID								Model Number							
		00 <sub>h</sub> -0F <sub>h</sub>	1	1	1	0	0	0	1	0	Manufacturer ID							
01 <sub>2</sub>	EPC (NVM)	110 <sub>h</sub> -11F <sub>h</sub>	EPC[15:0]															
		100 <sub>h</sub> -10F <sub>h</sub>	EPC[31:16]															
		0F0 <sub>h</sub> -0FF <sub>h</sub>	EPC[47:32]															
		0E0 <sub>h</sub> -0EF <sub>h</sub>	EPC[63:48]															
		...	...															
		40 <sub>h</sub> -4F <sub>h</sub>	EPC[223:208]															
		30 <sub>h</sub> -3F <sub>h</sub>	EPC[239:224]															
		20 <sub>h</sub> -2F <sub>h</sub>	EPC[255:240]															
		10 <sub>h</sub> -1F <sub>h</sub>	Protocol-Control Bits (PC)															
		00 <sub>h</sub> -0F <sub>h</sub>	CRC-16															
00 <sub>2</sub>	RESERVED (NVM)	30 <sub>h</sub> -3F <sub>h</sub>	Access Password[15:0]															
		20 <sub>h</sub> -2F <sub>h</sub>	Access Password[31:16]															
		10 <sub>h</sub> -1F <sub>h</sub>	Kill Password[15:0]															
		00 <sub>h</sub> -0F <sub>h</sub>	Kill Password[31:16]															

## 4.2 LOGICAL VS. PHYSICAL BIT IDENTIFICATION

For the purposes of distinguishing most significant from least significant bits, a logical representation is used in this datasheet where MSBs correspond to large bit numbers and LSBs to small bit numbers. For example, Bit 15 is the logical MSB of a memory row in the memory map. Bit 0 is the LSB. A multi-bit word represented by WORD[N:0] is interpreted as MSB first when read from left to right. This convention should not be confused with the physical bit address indicated by the rows and column addresses in the memory map; the physical bit address describes the addressing used to access the memory.

## 4.3 MEMORY BANKS

Described in the following sections are the contents of the NVM and ROM memory, and the parameters for their associated bit settings.

### 4.3.1 RESERVED MEMORY

Reserved Memory contains the *Access* and *Kill* passwords.

### 4.3.2 PASSWORDS

Monza 4 tag chips have a 32-bit Access Password and 32-bit Kill Password. The default password for both Kill and Access is 00000000<sub>h</sub>.

#### 4.3.2.1 ACCESS PASSWORD

The Access Password is a 32-bit value stored in Reserved Memory 20<sub>h</sub> to 3F<sub>h</sub> MSB first. The default value is all zeroes. Tags with a non-zero Access Password will require a reader to issue this password before transitioning to the secured state.

#### 4.3.2.2 KILL PASSWORD

The Kill Password is a 32-bit value stored in Reserve Memory 00<sub>h</sub> to 1F<sub>h</sub>, MSB first. The default value is all zeroes. A reader shall use a tag's kill password once to kill the tag and render it silent thereafter. A tag will not execute a kill operation if its Kill Password is all zeroes.

### 4.3.3 EPC MEMORY (EPC DATA, PROTOCOL CONTROL BITS, AND CRC16)

As per the Gen 2 specification, EPC memory contains a 16 bit cyclic-redundancy check word (CRC16) at memory addresses 00<sub>h</sub> to 0F<sub>h</sub>, the 16 protocol-control bits (PC) at memory addresses 10<sub>h</sub> to 1F<sub>h</sub>, and an EPC value beginning at address 20<sub>h</sub>.

The protocol control fields include a five-bit EPC length, a one-bit user-memory indicator (UMI), a one-bit extended protocol control indicator, and a nine-bit numbering system identifier (NSI). The UMI bit is set to a default value of 1 to indicate presence of user memory bank. Only for Monza 4QT tag chip models, the UMI bit value will change to 0 automatically when it is configured to Public Mode indicating no user memory. The default protocol control value is 3400<sub>h</sub>. For Monza 4QT in Public Mode, the default value is 3000<sub>h</sub>.

The tag calculates the CRC16 upon power-up over the stored PC bits and the EPC specified by the EPC length field in the stored PC. For more details about the PC field or the CRC16, see the Gen 2 specification.

A reader accesses EPC memory by setting MemBank = 01<sub>2</sub> in the appropriate command, and providing a memory address using the extensible-bit-vector (EBV) format. The CRC-16, PC, and EPC are stored MSB first (i.e., the EPC’s MSB is stored in location 20<sub>h</sub>).

For Monza 4QT tag chip models, the EPC memory contains a 96-bit, write-locked EPC in the Public mode, and a 128-bit EPC in the Private mode. For Monza 4QT chips (IPJ-W1502), the EPC value listed below is for the Private profile only.

The EPC written at time of manufacture is as shown in Table 4-6.

**Table 4-6 EPC at Manufacture**

IMPINJ PART NUMBER	PROTOCOL-CONTROL BITS AT MEMORY ADDRESSES 10 <sub>H</sub> TO 1F <sub>H</sub> <sup>1</sup>	EPC VALUE PRE-PROGRAMMED AT MANUFACTURE (HEX) <sup>2</sup>
IPJ-W1510	0011 0100 0000 0000	3008 33B2 DDD9 0140 0000 0000
IPJ-W1512		
IPJ-W1513		
IPJ-W1535		

Note 1: The protocol-control bits for Monza 4QT in Public Mode are “0011 0000 0000 0000”

Note 2: The EPC is factory encoded with 96 bits to ensure backward compatibility with older readers. Users must encode Monza 4 tag chips above 96 bits.

### 4.3.4 TAG IDENTIFICATION (TID) MEMORY

The ROM-based Tag Identification memory contains Impinj-specific data. The bit locations in TID row 00<sub>h</sub>-0F<sub>h</sub> store the EPCglobal™ Class ID (0xE2). The Impinj MDID (Manufacturer Identifier) for Monza 4 is 100000000001 (the location of the manufacturer ID is shown in the memory map tables in Section 4.1). Note that a logic 1 in the most significant bit of the manufacturer ID (as in the example bordered in solid black in the table) indicates the presence of an extended TID consisting of a 16-bit header and a 48-bit serialization. The Monza 4 tag chip model number is located in TID memory row 10<sub>h</sub>-1F<sub>h</sub> as shown in Table 4-7. See Table 4-8 for a list of the Monza 4 model numbers.

**Table 4-7 TID Memory Details**

MEMORY BANK DESCRIPTION	MEMORY BANK BIT ADDRESS	BIT NUMBER															
		15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
10 <sub>2</sub> TID (ROM)	50 <sub>h</sub> -5F <sub>h</sub>	TID_SERIAL[15:0]															
	40 <sub>h</sub> -4F <sub>h</sub>	TID_SERIAL[31:16]															
	30 <sub>h</sub> -3F <sub>h</sub>	TID_SERIAL[47:32]															
	20 <sub>h</sub> -2F <sub>h</sub>	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	10 <sub>h</sub> -1F <sub>h</sub>	0	0	0	1	Model Number (See Table 4-8)											
	00 <sub>h</sub> -0F <sub>h</sub>	1	1	1	0	0	0	1	0	1	0	0	0	0	0	0	0

**Table 4-8 Monza 4 Model Numbers**

MODEL	MODEL NUMBER
Monza 4QT	000100000101
Monza 4E	000100001100
Monza 4D	000100000000
Monza 4i	000100010100

## 5 Absolute Maximum Ratings

Stresses beyond those listed in this section may cause permanent damage to the tag. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this datasheet is not guaranteed or implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### 5.1 TEMPERATURE

Several different temperature ranges will apply over unique operating and survival conditions. Table 5-1 lists the ranges that will be referred to in this specification. Tag functional and performance requirements are met over the operating range, unless otherwise specified.

**Table 5-1 Temperature parameters**

PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNITS	COMMENTS
Extended Operating Temperature	-40		+85	°C	Default range for all functional and performance requirements
Storage Temperature	-40		+85/125	°C	At 125°C data retention is 1 year.
Assembly Survival Temperature			+150	°C	Applied for one minute
Temperature Rate of Change			4	°C / sec	During operation

## 5.2 ELECTROSTATIC DISCHARGE (ESD) TOLERANCE

The tag is guaranteed to survive ESD as specified in Table 5-2.

**Table 5-2 ESD Limits**

PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNITS	COMMENTS
ESD			2,000	V	HBM (Human Body Model)

## 5.3 NVM USE MODEL

Tag memory is designed to endure 100,000 write cycles or retain data for 50 years.

## 6 Ordering Information

Contact [sales@impinj.com](mailto:sales@impinj.com) for ordering support.

PART NUMBER	FORM	PRODUCT	PROCESSING FLOW
IPJ-W1510-E00, IPJ-W1512-E00, IPJ-W1513-E00 IPJ-W1535-E00	Wafer	Monza 4E tag chip Monza 4QT tag chip Monza 4D tag chip Monza 4i tag chip	Bumped, thinned (to ~100 μm) and diced

## 7 NOTICES

Copyright © 2016, Impinj, Inc. All rights reserved.

Impinj gives no representation or warranty, express or implied, for the accuracy or reliability of information in this document. Impinj reserves the right to change its products and services and this information at any time without notice.

EXCEPT AS PROVIDED IN IMPINJ'S TERMS AND CONDITIONS OF SALE (OR AS OTHERWISE AGREED IN A VALID WRITTEN INDIVIDUAL AGREEMENT WITH IMPINJ), IMPINJ ASSUMES NO LIABILITY WHATSOEVER AND IMPINJ DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATED TO THE SALE AND/OR USE OF IMPINJ PRODUCTS, INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY OR INFRINGEMENT.

NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY PATENT, COPYRIGHT, MASKWORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT IS GRANTED BY THIS DOCUMENT.

Impinj assumes no liability for applications assistance or customer product design. Customers should implement adequate design and operating safeguards to minimize risks.

Impinj products are not designed, warranted or authorized for use in any product or application where a malfunction may reasonably be expected to cause personal injury or death, or property or environmental damage ("hazardous uses"), including but not limited to military applications; life-support systems; aircraft control, navigation or communication; air-traffic management; or in the design, construction, operation, or maintenance of a nuclear facility. Customers must indemnify Impinj against any damages arising out of the use of Impinj products in any hazardous uses.

### *Trademarks*

Impinj, Monza, Speedway, xArray are trademarks or registered trademarks of Impinj, Inc. All other product or service names are trademarks of their respective companies. For a complete list of Impinj Trademarks visit: [www.impinj.com/trademarks](http://www.impinj.com/trademarks).

### *Patents*

The products referenced in this document may be covered by one or more U.S. patents. See [www.impinj.com/patents](http://www.impinj.com/patents) for details.